



safe
strong
sustain

PARAM ELEVATOR CO.

Lift Manufacturing | Modernisation | Maintenance

Government Approved Company

passenger elevator

automatic elevator

capsule elevator

hospital elevator

car elevator

goods elevator

hydraulic elevator

home elevator





MANUAL / AUTO DOOR PASSENGER ELEVATORS

LOAD CAPACITY		CAR INSIDE		LIFT WELL		ENTRANCE
PERSONS	KG	WIDTH A	DEPTH B	WIDTH C	DEPTH D	MANUAL / AUTO OPENING E
5	340	1100	850	1500	1300	700
6	408	1200	920	1600	1400	700
8	544	1300	1000*	1800	1500	800
10	680	1350	1300	1800	2000	800
13	884	2000	1100	2500	1800	900
20	1360	2000	1550	2500	2400	1000









*1100 in Auto Door Elevator

HOSPITAL ELEVATORS

LOAD CAPACITY		CAR INSIDE		LIFT WELL		ENTRANCE
PERSONS	KG	WIDTH A	DEPTH B	WIDTH C	DEPTH D	MANUAL OPENING E
15	1020	1000	2400	1800	3000	800
20	1360	1300	2400	2200	3000	1200
26	1768	1600	2400	2350	3000	1200


FREIGHT ELEVATORS

LOAD	CAR INSIDE		LIFT WELL		ENTRANCE
KG	WIDTH A	DEPTH B	WIDTH C	DEPTH D	CLEAR OPENING E
500	1100	1200	1900	1600	1000
1000	1400	1800	2300	2200	1300
1500	1700	2000	2600	2400	1600
2000	1700	2500	2600	2900	1600
2500	2000	2500	2900	2900	1800
3000	2000	3000	2900	3400	1800

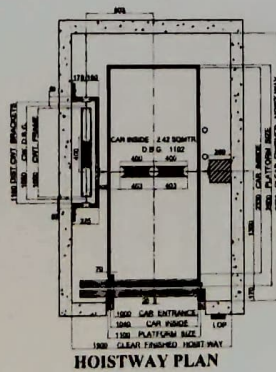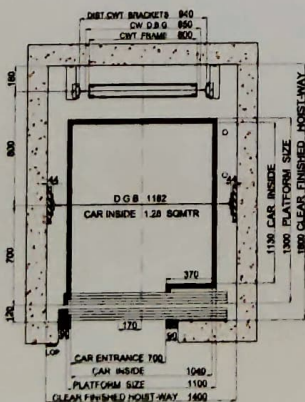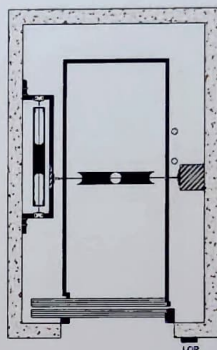

DUTY TABLE - GEARED MACHINE TOOLS

PERSONS	M/S KG	SPEED				
		0.5	1.0	1.5	1.75	2.0
5	320	IGD00				
6	408	IGD05				
8	544	IGD10				
10	680	IGD21				
13	884	IGD21				
15	1020	IGD21				
17	1156	IGD21				
18	1224	IGD39				
20	1360	IGD39				
23	1600	IGD39				
37	2500	IGD50				
81	5500	IGD60				

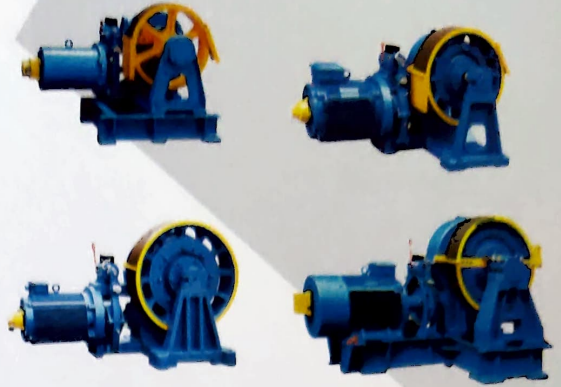

DUTY TABLE - GEARLESS MACHINE MODELS



For Regular Applications:

PERSONS	M/S KG	SPEED										
		0.5	1	1.5	1.75	2	2.5	3	4	5	6	7
6	408	IGL10										
8	544	IGL10										
10	680	IGL21										
13	884	IGL21										
15	1020	IGL21/IGL29										
17	1156	IGL21/IGL29										
18	1224	IGL29										
20	1360	IGL30										
23	1600	IGL25/IGL30										
30	2000	IGL25/IGL51										
34	2250	IGL35										

DUTY TABLE - GEARLESS MACHINE MODELS

For Restricted Overhead Space Applications:

PERSONS	M/S KG	SPEED				
		0.5	1	1.5	1.75	2
6	408	RGL00 - IN (8mm)				
8	544	RGL10 (8mm)				
10	680	RGL10 (8mm)				
13	884	RGL20 (8mm)				
15	1020	RGL20 (8mm)				
17	1156	RGL25 (8mm)				
18	1224	RGL25 (8mm)				
20	1360	RGL30 (8mm)				
23	1600	RGL30 (8mm)/RGL40 (10mm)				
30	2000	RGL30 (8mm)/RGL40 (10mm)				
37	2500	RGL40 (10mm)				

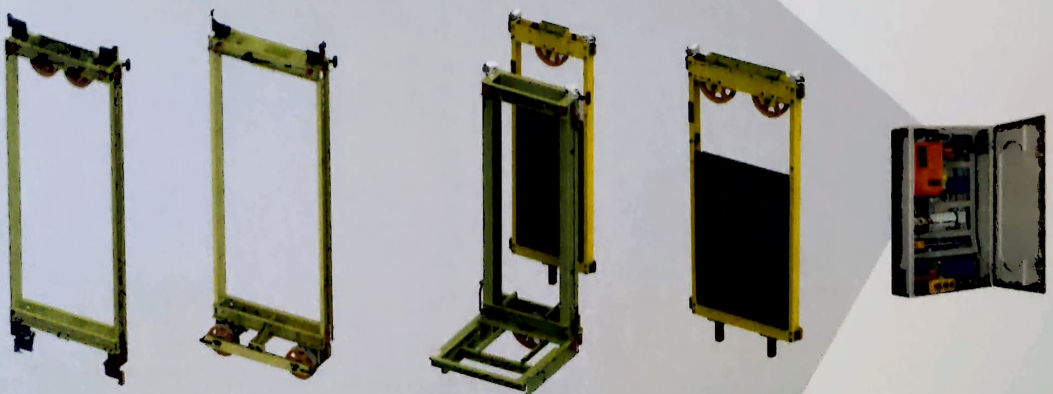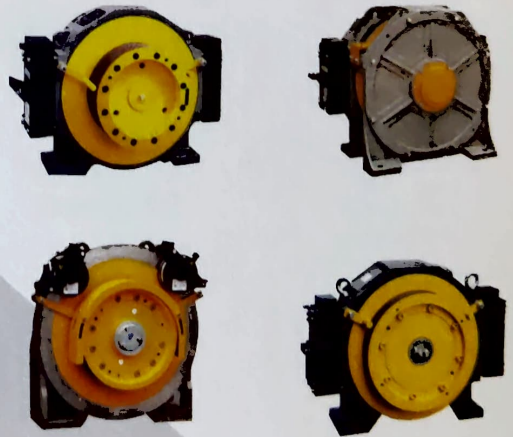



PARAM ELEVATOR CO.



salient features


Accommodating Design

Customizable Features

Highly Standardized Components

Heavy Duty Breaking System

Meets Industry Certification

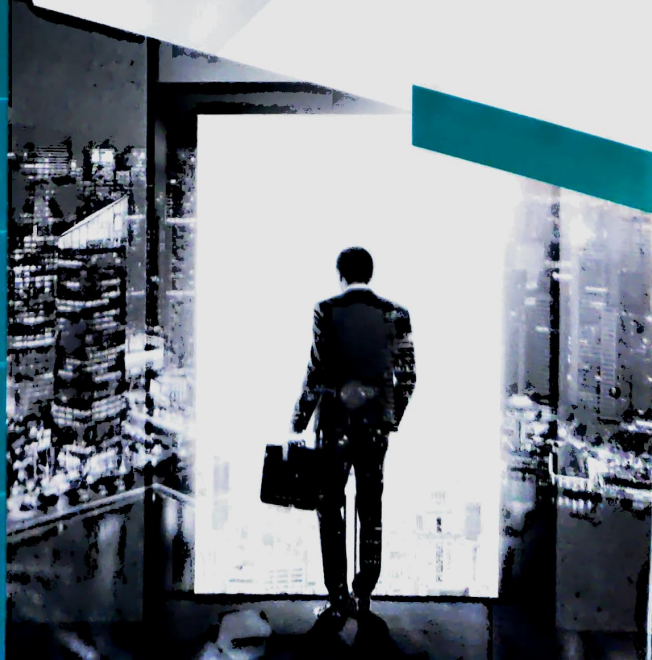



PARAM ELEVATOR CO.

Lift Manufacturing | Modernisation | Maintenance

Government Approved Company

📍 192, Krishna Park, B/h. IOC Quarter,
Kalawad Road, Rajkot (Gujarat).

☎ +91 281 2561407

📞 +91 97242 00060 / 94296 17778

✉ paramelevators@gmail.com



Branches : Ahmedabad | Baroda | Surat